



Samsung SMART Signage

QBR / QBT series

Display any content in ultra-high definition with incredibly rich color on slim, efficient signage.

Through intelligent UHD upscaling technology, Samsung's QBR and QBT series performs edge restoration and noise reduction to deliver UHD picture quality even with lower resolution content. Backed by Tizen 4.0, the QBR and QBT series also provides reinforced capability with multiple web formats and secured protection. Additionally, its new slim design simplifies wall mounting and ensures seamless installation.

Highlights

- Engage customers with lifelike images through ultra high-definition resolution
- Deliver UHD-level picture quality even with lower resolution content through Crystal Processor 4K supporting innovative UHD upscaling technology
- Dynamic Crystal Display allows viewers to enjoy a wider spectrum of colors, up to one billion shades
- Symmetrical, slim design simplifies installation and complements any environment
- Secure, PC-free operation through Knox and rigid three-layer protection

Key features



Slim and symmetrical design

The all-new slim and symmetrical design of the QBR and QBT series significantly simplifies wall mounting the display and ensures installation is a seamless process. The display's power inlet direction has been redesigned to sit flush against the wall. The new design sets guarantees a long life cycle ensuring the QBR and QBT series will stand the test of time.



Samsung Workspace secured by Knox

Samsung Workspace is a powerful new feature fortified by proprietary Knox security technology allowing users to create an enhanced virtual collaboration workspace without needing a PC in the room, or any physical connection. Simply connect a keyboard and mouse to the display and immediately get to work accessing a PC remotely or web-based cloud services such as Microsoft Office 365 and VMWare Horizon.

* Samsung Workspace feature support may vary by region and market conditions.


* The scheduled availability of this feature varies by model.



Wi-Fi and Bluetooth built-in

The QBR and QBT series features a nearly endless range of business use cases thanks to built-in Wi-Fi and Bluetooth. Wireless connectivity allows for personalized and interactive services including enabling integration with beacon technology in store, while also simplifying how businesses showcase content.

* Image is for illustrative purposes only, specific application or program may have to be developed for the depicted usage scenario.

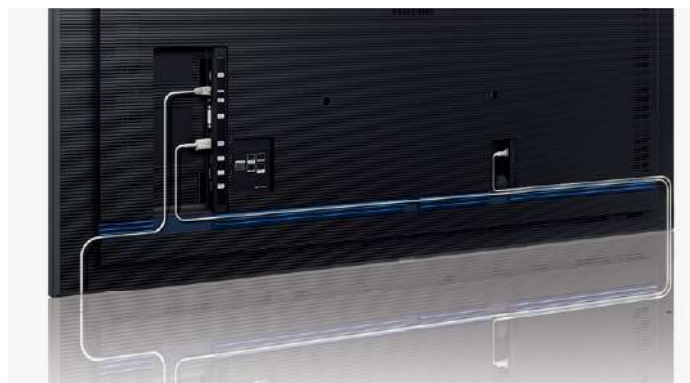

Clean cable management

In a corporate or retail environment, the back of a display is often visible to customers. With the QBR and QBT series' new cable guide feature retailers can tuck messy cables away from view. This allows for a clean and more visually-appealing customer shopping experience.



Powerful, all-in-one solution

The Samsung SMART Signage Platform (SSSP) is an open-source, all-in-one solution embedded in Samsung SMART signage that simplifies installation and maintenance. With SSSP, there is no need for any external devices to communicate with the server or play digital media enjoying easy development, reinforced capability with multiple web formats, and secured protection.



Industry standard certified

QBR displays are EMC class B compliant, providing a safe and healthy viewing environment by meeting strict standards of electromagnetic wave emission and assuring reliable operation even near other electronic equipment. The displays are also registered by EPEAT, the global ecolabel for IT, confirming the hardware is sustainable for the full product lifecycle, from design and production to energy use and recycling.

* QB85R and QB98T have EMC class A certification and not registered by EPEAT.

Specifications

Model			QB43R	QB50R	QB55R	QB65R	QB75R
Panel	Diagonal Size	Class	43	50	55	65	75
		Measured	42.5	50	54.6	64.5	74.5
	Type		Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU	Edge LED BLU
	Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)
	Pixel Pitch (mm)		0.2451 x 0.2451	0.285 x 0.285	0.315 x 0.315	0.372 x 0.372	0.42975 x 0.42975
	Active Display Area		941.184 (H) x 529.416 (V)	1095.84(H) x 616.41(V)	1209.6(H) x 680.4(V)	1428.48 (H) x 803.52 (V)	1650.24 (H) x 928.26 (V)
	Brightness(Typ.)		350	350	350	350	350
	Contrast Ratio (Typ.)		4000:1	4000:1	4000:1	4000:1	4000:1
	Viewing Angle(H/V)		178/178	178/178	178/178	178/178	178/178
	Response Time (G to G)		8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)	8ms(Typ.)
	Display Colors		16.7M(True Display) 1.07B(Ditherd 10bit)	16.7M(True Display) 1.07B(Ditherd 10bit)	16.7M(True Display) 1.07B(Ditherd 10bit)	16.7M(True Display) 1.07B(Ditherd 10bit)	16.7M(True Display) 1.07B(Ditherd 10bit)
	Color Gamut		92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)	92% (DCI-P3, CIE 1976)
	Operation Hour		16/7	16/7	16/7	16/7	16/7
	Haze		2%	2%	2%	2%	2%
Display	Dynamic C/R		MEGA	MEGA	MEGA	MEGA	MEGA
	H-Scanning Frequency		30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz	30 ~ 81kHz
	V-Scanning Frequency		48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz	48 ~ 75Hz
	Maximum Pixel Frequency		594MHz	594MHz	594MHz	594MHz	594MHz
Sound	Speaker Type		Built in Speaker(10W + 10W)	Built in Speaker(10W + 10W)	Built in Speaker(10W + 10W)	Built in Speaker(10W + 10W)	Built in Speaker(10W + 10W)
Connectivity	INPUT	DVI-D	DVI-D	DVI-D	DVI-D	DVI-D	DVI-D
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)
		HDCP	HDCP 2.2	HDCP 2.2	HDCP 2.2	HDCP 2.2	HDCP 2.2
		AUDIO	Stereo Mini Jack, DVI/HDMI/ Audio(Common)	Stereo Mini Jack, DVI/HDMI/ Audio(Common)	Stereo Mini Jack, DVI/HDMI/ Audio(Common)	Stereo Mini Jack, DVI/HDMI/ Audio(Common)	Stereo Mini Jack, DVI/HDMI/ Audio(Common)
		USB	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2
	OUTPUT	RGB	N/A	N/A	N/A	N/A	N/A
		VIDEO	N/A	N/A	N/A	N/A	N/A
		AUDIO	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack
		Power Out	N/A	N/A	N/A	N/A	N/A
		USB	N/A	N/A	N/A	N/A	N/A
	EXTERNAL CONTROL		RS232C(in/out) thru stereo jack, RJ45	RS232C(in/out) thru stereo jack, RJ45	RS232C(in/out) thru stereo jack, RJ45	RS232C(in/out) thru stereo jack, RJ45	RS232C(in/out) thru stereo jack, RJ45
	EXTERNAL SENSOR		IR	IR	IR	IR	IR
	Tuner		N/A	N/A	N/A	N/A	N/A
	Type		Internal	Internal	Internal	Internal	Internal
Power	Power Supply		AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz
	Power Consumption	Max[W/h]	110	143	143	181.5	231
		Typical[W/h]	67	86	108	128	150
		Rating[W/h]	100	130	130	165	210
		BTU(Max)	375.1	487.6	487.6	618.9	787.7
		Sleep mode	0.5	0.5	0.5	0.5	0.5
		Off mode	N/A	N/A	N/A	N/A	N/A
Mechanical Spec	Dimension(mm)	Set	967.5 x 557.7 x 48.3	1121.4 x 643.9 x 46.3	1235.1 x 707.9 x 46.3	1453.9 x 831.0 x 46.3	1681.1 x 960.1 x 49.7
		Package	1095 x 676 x 151	1269 x 784 x 152	1402 x 858 x 163	1611 x 973 x 185	1871 x 1127 x 223
	Weight (kg)	Set	10	13.4	18.1	24.9	38.3
		Package	13.3	17.6	23.6	33.3	49
	VESA Mount		200 x 200	200 x 200	200 x 200	400 x 400	400 x 400
	Protection Glass		N/A	N/A	N/A	N/A	N/A
	Stand Type		Foot Stand (Optional)	Foot Stand (Optional)	Foot Stand (Optional)	No	No
Operation	Bezel Width (Top/Side/Bot) (mm)		9.2mm(U/L/R), 11.2mm(B)	9.2mm(U/L/R), 11.2mm(B)	9.2mm(U/L/R), 11.2mm(B)	9.2mm(U/L/R), 11.2mm(B)	11.5mm(U/L/R), 12.5mm(B)
	Operating Temperature		0°C~ 40°C	0°C~ 40°C	0°C~ 40°C	0°C~ 40°C	0°C~ 40°C
Feature	Key		UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0
	Special	H/W	Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi/BT	Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi/BT	Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi/BT	Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi/BT	Temperature Sensor/Pivot Display, Clock Battery(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi/BT
		S/W	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)
	Internal Player (Embedded H/W)	Processor	Coretex A721.7GHz Quad-Core CPU	Coretex A721.7GHz Quad-Core CPU	Coretex A721.7GHz Quad-Core CPU	Coretex A721.7GHz Quad-Core CPU	Coretex A721.7GHz Quad-Core CPU
		On-Chip Cache Memory	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB	L1 Instruction Cache : 48KB L1 Data Cache : 32KB L2 Cache : 2MB
		Clock Speed	1.7GHz	1.7GHz	1.7GHz	1.7GHz	1.7GHz
		Main Memory Interface	2.5GB LPDDR4 1.5GHz 64bit	2.5GB LPDDR4 1.5GHz 64bit	2.5GB LPDDR4 1.5GHz 64bit	2.5GB LPDDR4 1.5GHz 64bit	2.5GB LPDDR4 1.5GHz 64bit
		Graphics	Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.)	Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.)	Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.)	Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.)	Graphic resolution : 1920x1080 Output resolution : 3840x2160 (Scale up from graphic processing result.)
	Multimedia	Storage (FDM)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)	8GB (3.88GB Occupied by O/S, 4.12GB Available)
			*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9
			*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG
		IO Ports	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0
	Operating System		Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
Certification	Safety		60950-1	60950-1	60950-1	60950-1	60950-1
	EMC		Class B	Class B	Class B	Class B	Class B
	Environment		ENERGY STAR 8.0, Epeat	ENERGY STAR 8.0, Epeat	ENERGY STAR 8.0, Epeat	ENERGY STAR 8.0, Epeat	ENERGY STAR 8.0, Epeat
	Security		802.1x(WPA2 Enterprise) (201-) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) (201-) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) (201-) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) (201-) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) (201-) : EAP-TLS, EAP-TTLS, EAP-PEAP
Accessories	Included		Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries
	Optional	Stand	STN-L4355F	STN-L4355F	STN-L4355F	No	No
		Mount	WMN4070SE (Land Only)	WMN4070SE (Land Only)	WMN4070SE (Land Only)	WMN4277SE (Land Only)	WMN4277SE (Land Only)
		Specialty	CML400XK	CML400XK	CML400XK	CML450K	CML450K
		Media Player	N/A	N/A	N/A	N/A	N/A